


HOW TO Tension Fence Wire

WITH HANDS

What You'll Need:

- Protective gloves
- Line tensioning wire
- T posts
- Wire cutters


1 Insert Into the Hole

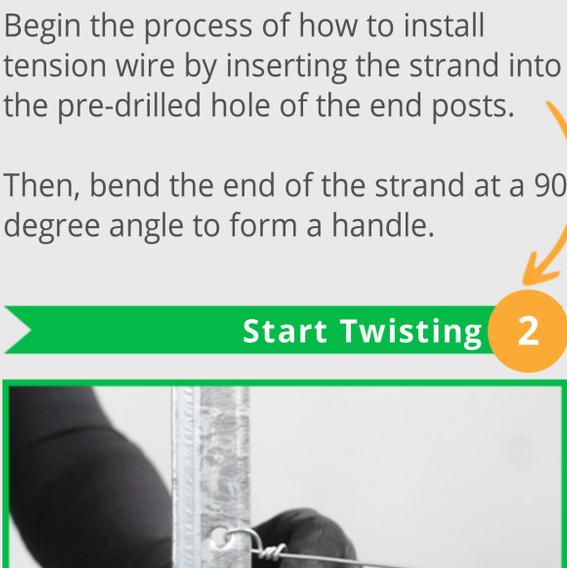

Begin the process of how to install tension wire by inserting the strand into the pre-drilled hole of the end posts.

Then, bend the end of the strand at a 90 degree angle to form a handle.

2 Start Twisting

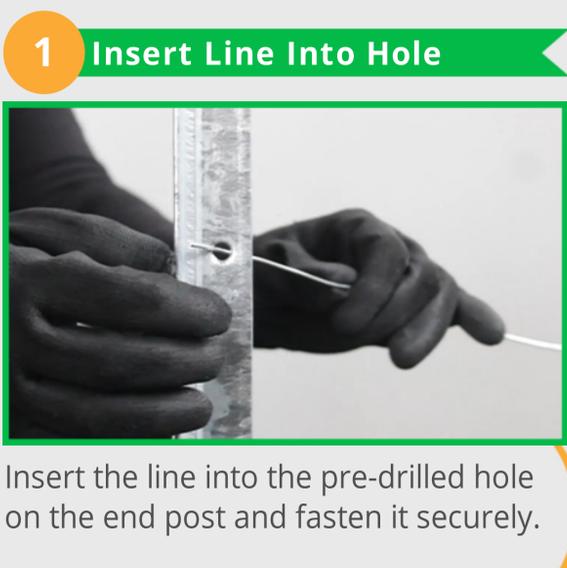

Hold pressure on the handle and wrap it around the live wire 4-5 times.


Then, cut off the excess strand.

WITH PLIERS

What You'll Need:


- Protective gloves
- Line tensioning wire
- T posts
- Pliers
- Wire cutters

1 Insert Line Into Hole

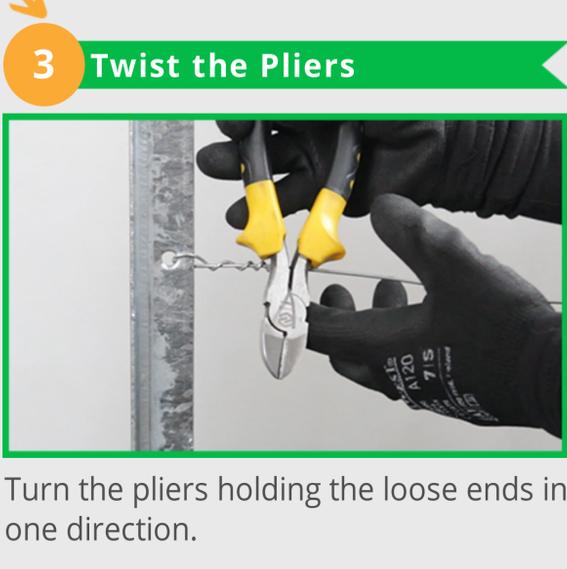

Insert the line into the pre-drilled hole on the end post and fasten it securely.

2 Insert Wire Between Handles

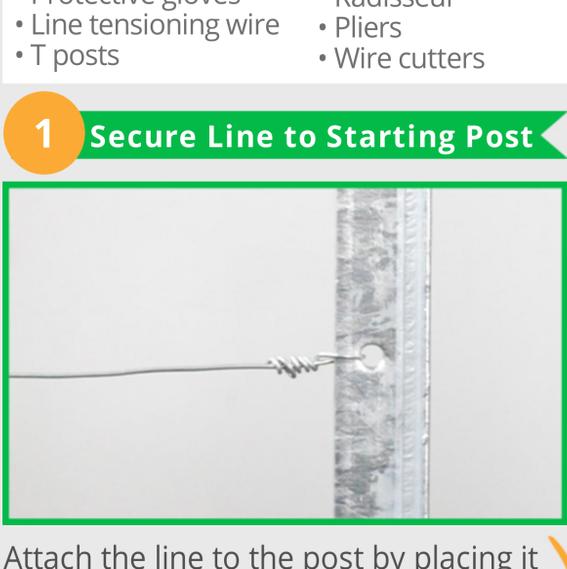


Slightly open the pliers to create a gap between the handles.

Insert the looped end of the strand into the space between them.

Gently close the pliers so the loop stays in place but can still rotate freely.

3 Twist the Pliers

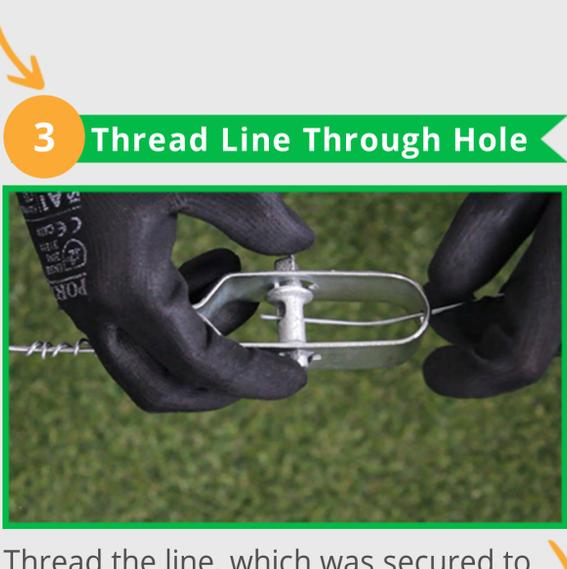

Turn the pliers holding the loose ends in one direction.

Continue twisting until the line is tight.


Once secure, bend the excess line back and cut it.

WITH RADISSEUR

What You'll Need:


- Protective gloves
- Line tensioning wire
- T posts
- Radisseur
- Pliers
- Wire cutters

1 Secure Line to Starting Post

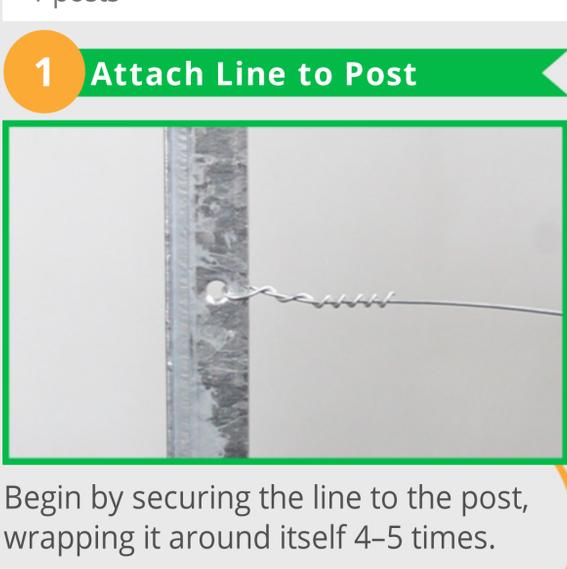


Attach the line to the post by placing it in the hole, then wrap it around itself 4-5 times to maintain the tightness.

2 Secure Radisseur to Last Post

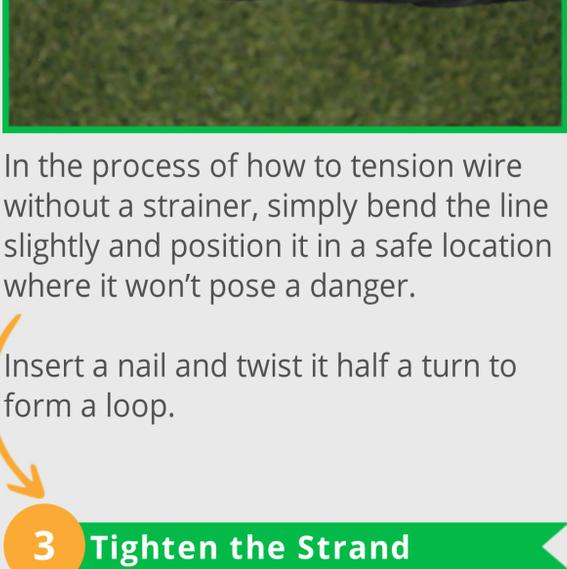

Attach a radisseur to the last post using a separate piece of line.

3 Thread Line Through Hole

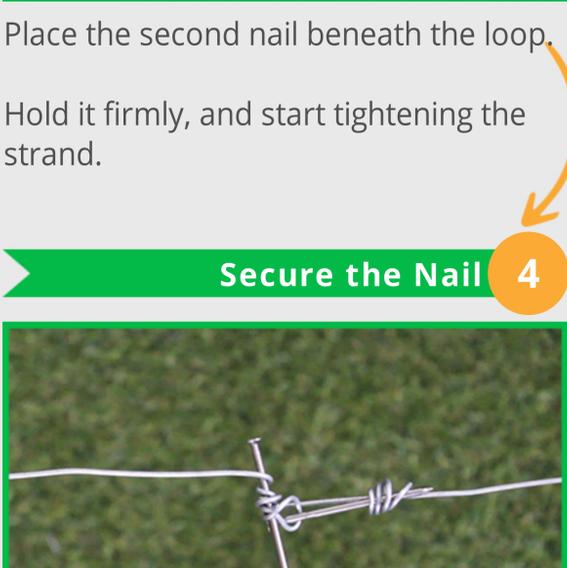

Thread the line, which was secured to the other end post, through the hole in the center of the radisseur.

4 Tighten the Line


Use pliers to twist the pin on the radisseur clockwise to tighten the line and finish the process of how to tension fence wire.

WITH TWO NAILS

What You'll Need:


- Protective gloves
- Line tensioning wire
- T posts
- 2x nails
- Wire cutters

1 Attach Line to Post

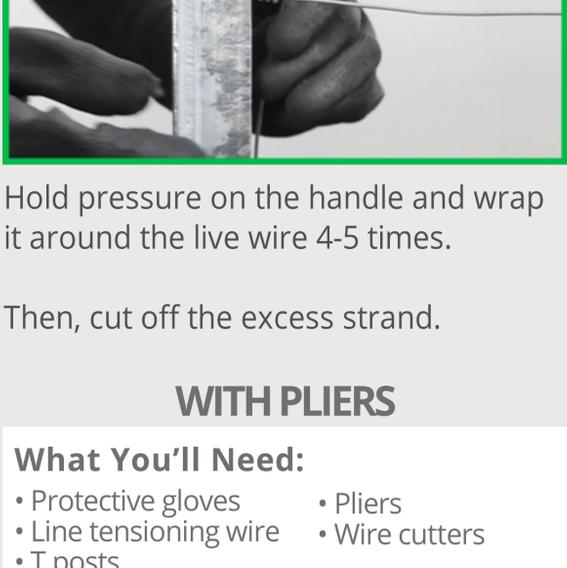

Begin by securing the line to the post, wrapping it around itself 4-5 times.


2 Create a Loop

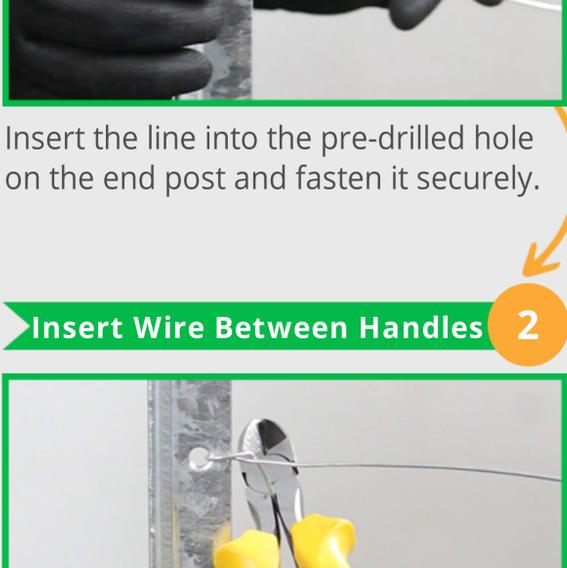

In the process of how to tension wire without a strainer, simply bend the line slightly and position it in a safe location where it won't pose a danger.

Insert a nail and twist it half a turn to form a loop.


3 Tighten the Strand

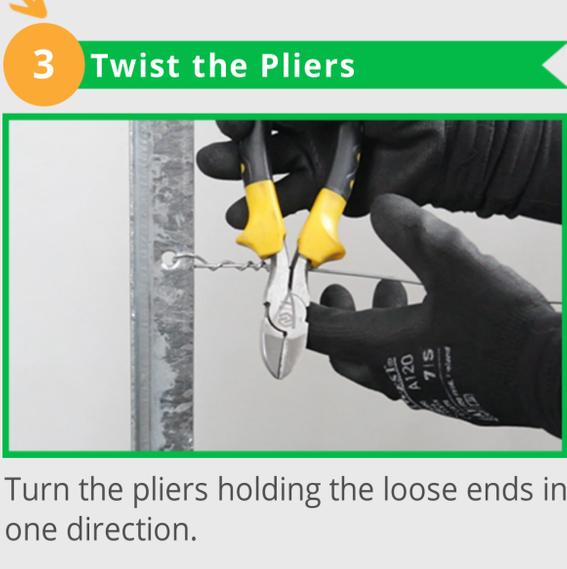

Place the second nail beneath the loop.

Hold it firmly, and start tightening the strand.

4 Secure the Nail

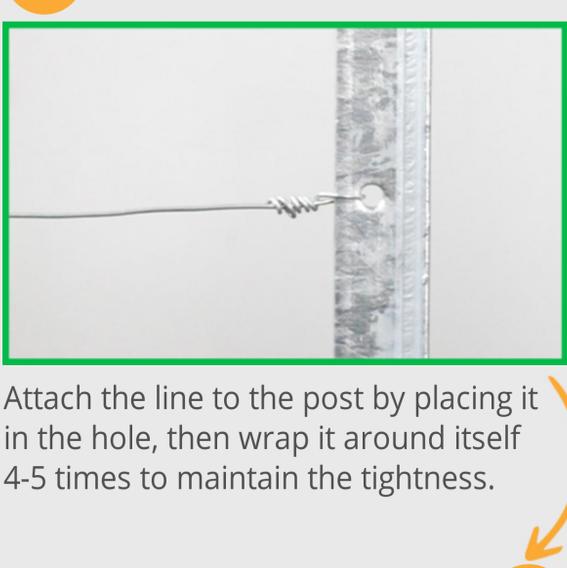

Secure the nail to the strand using a separate piece of line.